


PLYCO

CORPORATION
PO BOX 386 • ELKHART LAKE, WI 53020

SERIES 95EV UTILITY DOORS

**SERIES 95EV
UTILITY DOORS**

- *Low Maintenance*
- *Economy*
- *Easy Installation*
- *Energy Saving*

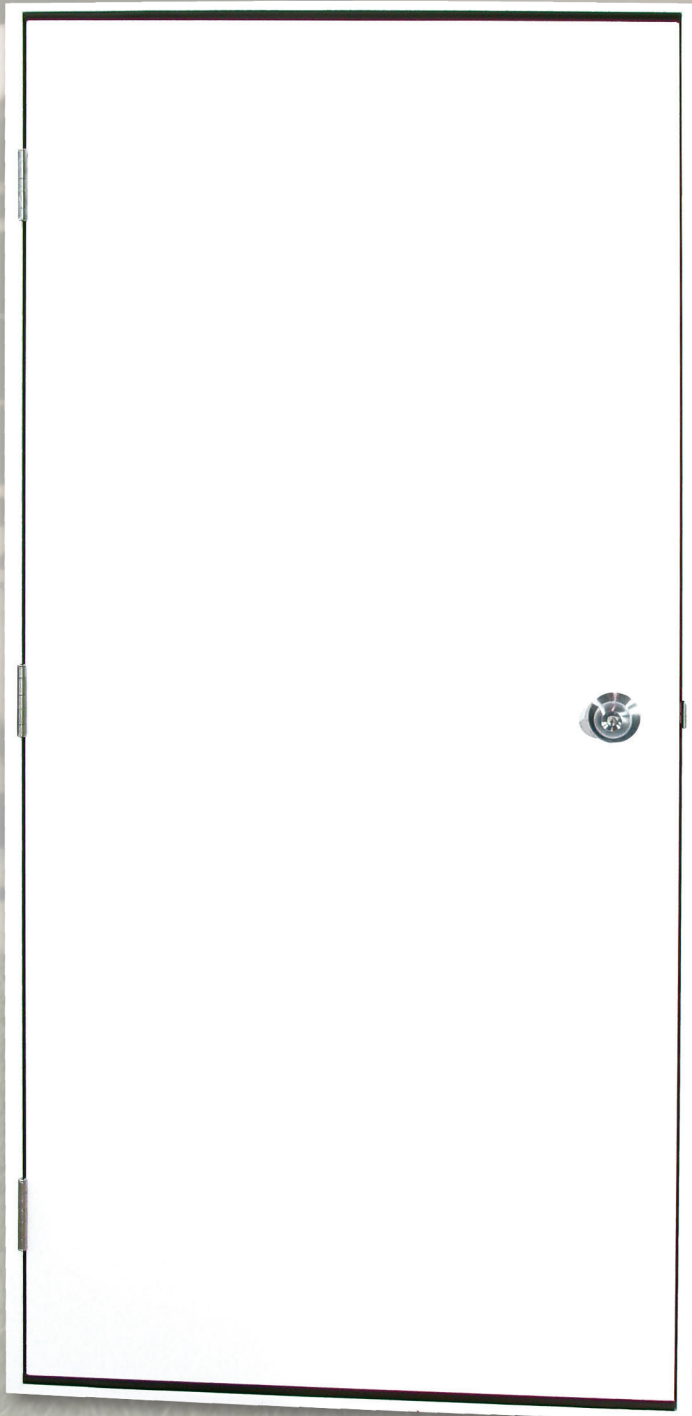

- *Rolled Edge*
- *Durable and Attractive*
- *4 Way Universal*
- *Single Piece 16 ga Jamb*



- Weather Fin and bulb help keep bad weather outside and good air inside

Windows:

- Many light kits are available

1-LU 4 X 48 1-LE 16 X 16 1-LA 20 X 24

1-LI 20 X 24 1-LB 22 X 36

1-LS-2 4x48 9-LB 22 X 36 W/GRIDS




PLYCO Series 95 Utility Door

We have incorporated:


- Universal swing feature, and is fully reversible in the 3 1/2" thick jamb
- Polyurethane Foam Core which reduces sound and possesses superior insulating qualities, R-13
- Three 4 x 4 butt hinges per door - prevents wracking and assures smooth positive operation
- Heavy duty 16 gauge steel frame
- Full perimeter weather stripping
- Optional dedicated threshold available
- Variety of locks, hardware and windows available (optional)
- 3068 available with crossbuck and six panel embossing

Available in 2 popular colors

Polar White



Chocolate Brown



■ Two fin and bulb top and bottom weather seals contact header and threshold to greatly reduce water infiltration



■ Q-Lon weather seal



■ Comes with standard 3-1/2" Pre-painted 16 gauge steel jamb



■ Dedicated Swing Thresholds are Available



■ Optional Foam-Injected Insulated Jamb

**PLYCO CORPORATION
USA**
800/558-5895
FAX: 800/257-5926
INTERNATIONAL
920/876-3611
FAX: 920/876-3527
www.plyco.com

PLYCO Series 95EV Door

SIZES	2/6 x 6/8 2/8 x 6/8 3/0 x 6/8 3/6 x 6/8 4/0 x 6/8 Dbl. 6/0 x 6/8 Dbl. 8/0 x 6/8 3/0 x 7/0 3/6 x 7/0 4/0 x 7/0 Dbl. 6/0 x 7/0 Dbl. 8/0 x 7/0
OVERALL DIMENSIONS	a) For correct out to out dimensions see Data Sheet DO-3, 3068 size is 38" x 81 3/8 b) For Rough Opening dimensions, use dimensions (above - a) and add 1/2" to width and 3/8" to height.
MULLION / ASTRAGAL	Double doors have attached astragal on the inactive panel of the pair - shipped knocked- down. Hinges are attached to jambs. Manual head and foot bolt concealed in the astragal with full header
HINGES	(3) 4" x 4" zinc plated fixed-pin hinges are standard, SS/NRP available as an option
THRESHOLD	Aluminum
DOOR PANEL	
THICKNESS	1 3/4"
SKIN	Smooth 26 ga. Galvanized steel painted finish Polar White
EDGES	Rolled edge in aluminum core rails
BLOCKING	HDPE lock reinforced structure, optional closer blocking Special lock blocking is available
INSULATION	Panel R-13
EMBOSSING	3/0 x 6/8 only - Six panel style
COLORS	Available in Polar White and Chocolate Brown
LOCK FACE PREP	Standard with 2 1/8" lockset bore, backset of 2 3/4" (no bore is optional)
DEAD BOLT	Prep is optional, latchguard available as an option
SWEEP	Durable Alcryn Bulb & fin
LITE KITS	1-LI-2 20" x 24" Insulated 1-LA-2 20" x 24" Single glazed 1-LE-2 16" x 16" Insulated 1-LB-2 22" x 36" Insulated 1-LU-2 4" x 48" Single glazed 9-LB-2 22" x 36" Insulated with 9-Lite internal grids 1-LS-2 4" x 48" Insulated
	Other glass sized available - lite kits listed above are most common
JAMB	
TYPE	PREHUNG with kerf 3 1/2"
MATERIAL	16 ga Steel galvanized pre-painted
FEATURES	Q-Lon Weather Seal kerf seal
FLASHING	N/A
TESTING	
	AMMA/WDMA/CSA 101/I.S.2/A440-08 - Standard - NAFS - Certified Performance Label Available.
Air Infiltration	ASTM-E283 <.20 CFM/ft Passed
Water Penetration	ASTM-E331 No leakage Passed
Physical Endurance	AAMA 920 100,000 cycles Passed
Forced Entry Resistance	AMMA 1304 300 lb. Point Load Passed
Wind-Storm Resistance	ASTM-E330-02 Single Lock +/-50 psf Class LC-PG50 (38x86) (Flush Doors, up to 3070) Deadlock added +/-75 psf Class LC-PG75 (38x86)
	(See Texas Product Evaluation #DR-538 & Florida FBC Product Approval #FL14800 95EV)



www.plyco.com 800/558-5895 FAX: 800/257-5926
INTERNATIONAL 920/876-3611 FAX: 920/876-3527

WINDOWS • WALK DOORS • WALL VENTS • RIDGE VENTS
SLIDING DOOR TRACK • SLIDE DOOR RAILS • PLY-FOIL INSULATION
HORSE STALLS • FASTENERS & CLOSURES • SPECIALTY PRODUCTS

Due to Plyco Corporation's ongoing commitment to product improvement, we reserve the right to change, without notice, product specifications, availability.